


## Portal milling machine

# BORNEMANN Ace

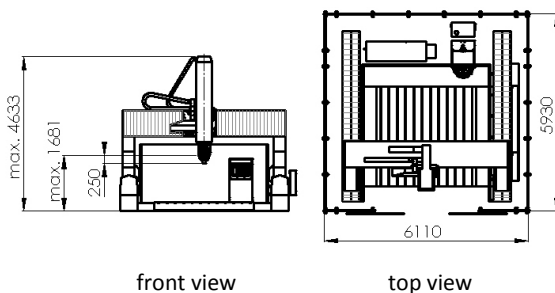

### Application fields

- for very fast, precise, and reliable milling of many different materials
- for extremely diverse manufacturing applications including large-volume models (foundry models, design models, data control models, cubing models), moulds, samples, sculptures, decorations, packaging and many more
- travel distances X=3000 mm, Y=3000 mm, Z=1250mm (optional Z=1500mm, A =  $\pm 100^\circ$ , C =  $\pm 200^\circ/\pm 270^\circ$ )
- milling spindle power up to 13.5 kW

### Milling materials

- foamed plastics
- homogeneous plastics
- resins
- wood
- composite materials
- fibre composites
- aluminium



## Portal milling machine **BORNEMANN Ace**

### Advantages

- functional and innovative machine concept
- highly dynamic
- always reliable
- good resale value
- attractive design
- moving portal – workpiece stationary
- stable, vibration-free machine modules
- portal with gantry synchronous drive
- drive motors are digitally controlled
- supply cables tidily integrated
- X- and Y-axis with play-free rack and pinion drives
- Z-axis with play-free ball-type linear guide
- effective bellows covers for the axes
- guiding elements protected from dust and machining chips
- short installation/commissioning time at the site
- operation is easy to learn
- low maintenance expenses

### Equipment variants

#### type 'Standard'

for milling foamed plastics

- 3 NC-axes
- milling spindle: milling motor with hollow shaft, with tool holder for hollow cutters and collet chucks
- milling table: clamping plate made of laminated wood, 3000x3000x180 mm
- CNC control Heidenhain TNC 640
- mobile operating console with colour monitor and keyboard
- electronic hand-wheel
- central lubricating system
- CE protective wall system: 1 front wall, 1 side wall
- switch cabinet incl. air conditioning unit
- painting in RAL 7036 (platinum grey) / RAL 3000 (flame red)
- technical documentation incl. operating instructions, wiring diagram, maintenance plan and spare parts list

#### type 'Class'

for milling of plastics, compound materials, fibre composites, wood, laminated wood

as type Standard, but:

- milling spindle, 13.5 kW, max. 18000 min<sup>-1</sup>, with tool holder HSK A 63
- milling table: clamping plate made of cast, 3000x3000x280mm, with T-grooves

in addition to type Standard:

- direct travel distance measuring systems for the axes
- tool changing system with 6 tool places
- ricochet walls as chip collector for the working area
- lighting below the portal

#### type 'Premium'

für milling of aluminium

in addition to type Class:

- lubricant starvation system
- oil mist suction system

### Options for all equipment variants

#### for type Standard:

- direct travel distance measuring systems for the axes
- vacuum pump set for clamping plate made of laminated wood

#### for types Class and Premium:

- 6 additional tool places for tool changing system

#### for types Standard, Class and Premium:

- additional A-swivelling axis for 4-axis milling incl. software for dynamic collision monitoring
- additional A-swivelling axis and C-rotating axis for 5-axis milling, incl. software for dynamic collision monitoring
- CNC control from other manufacturers
- extension for CE protective wall system: 1 side wall and/or 1 rear wall
- CE full housing including the ceiling
- radio hand-wheel
- touch probe for automatic tool measurement and tool fracture check
- painting in up to two RAL colour shades according to the customer requirements

### Technical data

	Standard / Class / Premium	Option
working ranges		
X-axis	3000 mm	
Y-axis	3000 mm	
Z-axis	1250 mm	1500 mm
A-swivelling axis		±100°
C-rotating axis		±200°/±270°
feed rate		
X-axis	30 m/min	
Y-axis	30 m/min	
Z-axis	30 m/min	
A-axis		60°/s
C-axis		60°/s
Required space		
length	5930 mm	
width	6110 mm	
height	4633 mm	5133 mm
machine weight		
type 'Standard'	12900 kg	
type 'Class'	19900 kg	
type 'Premium'	20200 kg	

Technical modifications reserved. Status January 2019